


PowerTech™

6068AFM85 Diesel Engine

Propulsion Engine Specifications




JOHN DEERE

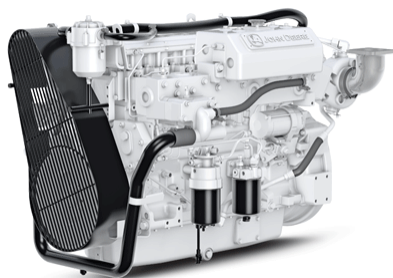

6068AFM85 shown

Dimensions

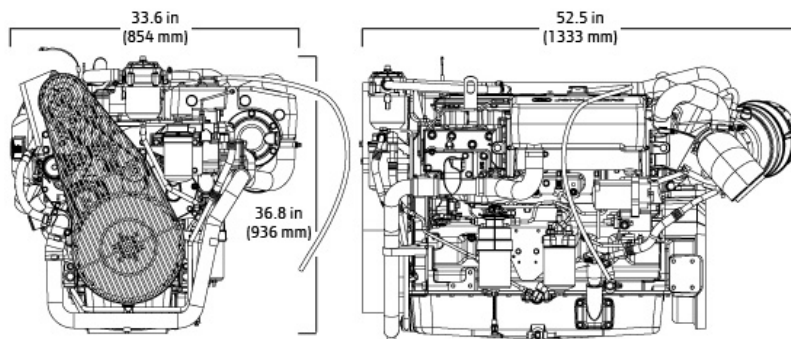

Certifications

EPA Commercial Marine Tier 3

IMO MARPOL Annex VI Compliant

NRMM (97/68/EC) as amended

General data

Model	6068AFM85	Length - mm (in)	1333 (52.5)
Number of cylinders	6	Width - mm (in)	854 (33.6)
Displacement - L (cu in)	6.8 (415)	Height, Centerline to Top-- mm. (in)	646 (25.4)
Bore and Stroke-- mm (in)	107 x 127 (4.21 x 5.00)	Height, Centerline to Bottom-- mm. (in)	290 (11.4)
Compression Ratio	16.7:1	Weight, dry-- kg (lb)	787 (1735)
Engine Type	In-line, 4- Cycle	Maximum Installed Angle	Front Up – degrees 12
Aspiration	Turbocharged and air-to-coolant aftercooled		Front Down – degrees 0

Features and benefits

Watercooled Turbocharger and Exhaust Manifold

- A true marine wet turbocharger and wet exhaust manifold lowering surface and engine room temperatures
- Integrated components reduce external connections, hose and fitting that can leak or break

Replaceable Wet-type Cylinder Liners

- Hardened and precision machined for long life
- Rebuild to original specifications

High Pressure Common Rail Fuel System

- High pressure common rail fuel system provides high performance, excellent fuel economy, and low emissions
- Electronic transfer pump provides self-priming fuel system for ease of maintenance

Heat Exchanger or Keel Cooled

- Integrated expansion tank and heat exchanger
- Low maintenance single circuit keel cooled option for your applications needs

High Torque and Low Rated RPM

- Excellent vessel control and maneuvering
- Lower rated rpm limits vibration and noise





Corrosion Resistant Components

- Provides engine protection from the effects of seawater

John Deere Electronic Controls

- Advanced fault code diagnostics and customizable engine protections ensure reliability and uptime
- Highly customizable features and trim to integrate your vessel and meet specific applications needs

Performance curve

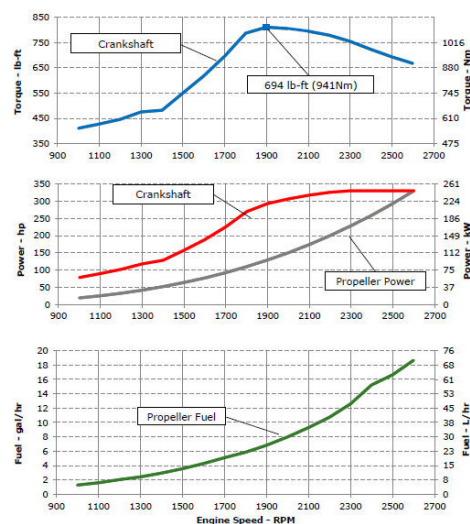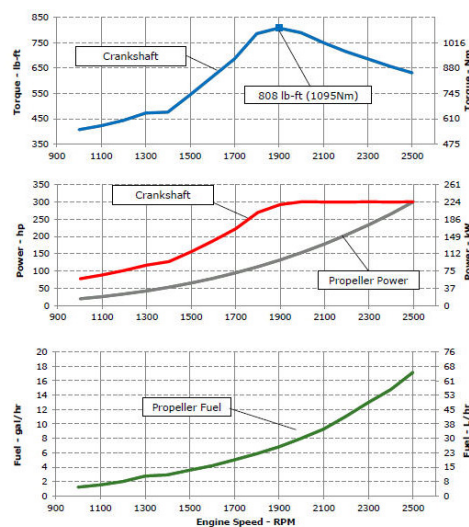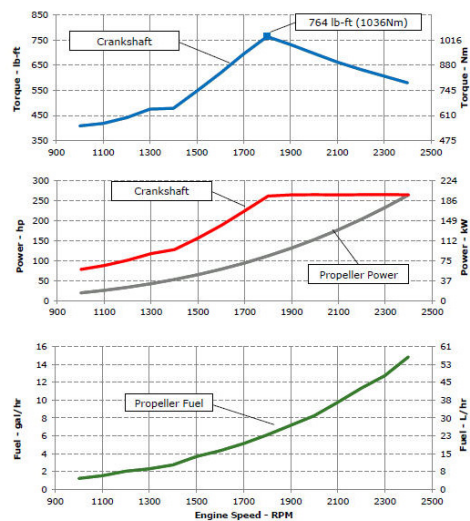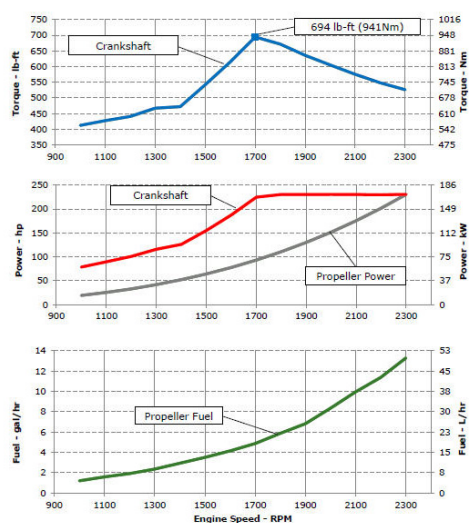

Performance data	M4	M3	M2	M1
Rated Power - kW (hp)	246 (330)	224 (300)	198 (266)	172 (231)
Rated Speed - rpm	2600	2500	2400	2300
Low Idle Speed - rpm	600	600	600	600
Peak Torque - Nm (ft-lb)	1099 (811)	1095 (808)	1036 (764)	941 (694)
Peak Torque Speed - rpm	1900	1900	1800	1700
Fuel Consumption - L/h (gal/hr)	71.2 (18.8)	76.0 (20.1)	57.9 (15.3)	50.9 (13.4)

M rating	M4	M3	M2	M1
Typical load factor	< =40%	< =50%	< =65%	> 65%
Typical annual usage (hr)	1,000-3,000 hr	2,000-4,000 hr	3,000-5,000 hr	Unrestricted
Typical full-power operation (hr)	1 of each 12 hr	4 of each 12 hr	16 of each 24 hr	Uninterrupted

John Deere Power Systems
 3801 W. Ridgeway Ave.
 PO Box 5100
 Waterloo, IA 50704-5100
 Phone: 1-800-533-6446
 Fax: 319.292.5075

John Deere Power Systems
Usine de Saran
 La Foulonnerie - B.P. 11.13
 45401 Fleury les Aubrais Cedex
 France
 Phone: 33.2.38.82.61.19
 Fax: 33.2.38.82.60.00

Preliminary Information
 All values at rated speed and power with standard options unless otherwise noted.
 Specifications and design subject to change without notice.